


Electric Driving Axle

KEA165-3S40K



特百佳动力
— TOP GEAR —

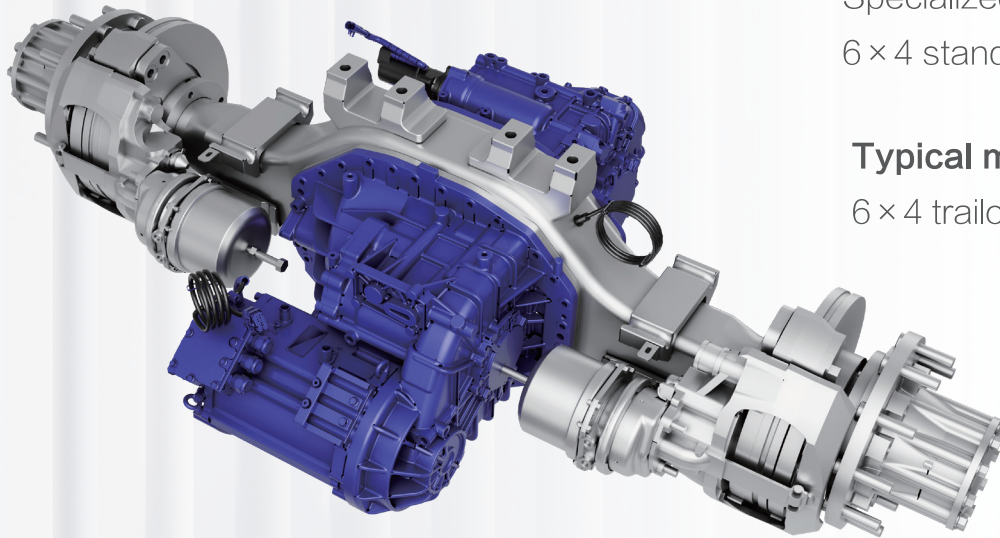

Specialized for
6 × 4 standard load work condition

Typical model:
6 × 4 trailer

Motor Parameters (Single Motor Module)

| | | | |
|---------------------|-------|-------------------|--------|
| Rated power (kW) | 165 | Peak power (kW) | 240 |
| Rated torque (Nm) | 250 | Peak torque (Nm) | 490 |
| Rated speed (r/min) | 6,303 | Max speed (r/min) | 12,000 |

Gearbox Parameters

| | | | |
|-----------------------|---------|-------------|-------------------|
| Model | TX-3S5F | Speed ratio | 89.39/32.50/14.34 |
| Max input torque (Nm) | 490 | PTO | Integrated |

Assembly Parameters

| | | | |
|------------------------|--------|----------------------|------|
| Gross weight (kg) | 930 | Max permitted load | 13t |
| Max output torque (Nm) | 40,225 | System efficiency(%) | >=93 |

Top Gear Powertrain Technology Co.,Ltd

Building 2, No. 8158 Tingwei Highway, Jinshan Industrial Zone, Shanghai, China

Learn more at
<http://en.shtopgear.com>